

## Specifications

Construction: Rigid Core  
Stone Polymer Composite  
Edge Type: Beveled  
Overall Thickness: 6.5mm  
Wear Layer: 0.5mm (20mil)  
Nominal Length: 60" x Width: 9"  
Coverage per Carton: 19.25 ft<sup>2</sup>  
Pieces per Carton: 5  
Weight per Carton: 38 lbs.  
Installation Method: Floating  
Recommended Usage: Residential &  
Light Commercial



This product is protected by a 50 year residential/10 year light commercial warranty



This floor is waterproof and won't be affected by household spills

## Features

The 6.5mm Nordic Collection is constructed with a high density thermo-plastic composite which is extremely stable and can be installed over most sub floors. Since there are no wood fibers, the Nordic Collection is 100% Waterproof and can be wet mopped. The natural embossing allows for an authentic wood look while the rigidity of the core resists indentations and wear from everyday household traffic.


## Recommended Underlayment

- **6MIL Vapor Barrier** (must use when installing over concrete)
- **2mm RUBBER Enhanced Acoustical Underlayment**

## Technical Data

	<p>GREENGUARD Certification ensures that a product has met some of the world's most rigorous and comprehensive standards for low emissions of volatile organic compounds (VOCs) into indoor air.</p>
	<p>FloorScore® is the most recognized indoor air quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments.</p>

## Accessories

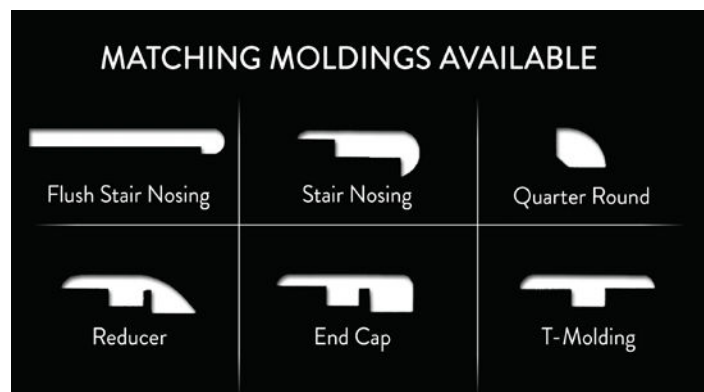

Product	Overall Thickness	6.5mm (No Pad)		
Dimensions	Width and Length	235mmW x 1522mmL		
Packaging (Per Carton)		5 Planks	19.25 Sq.Ft.	38 Lbs
Construction	Top Layers	High Definition Decor Film		
		Enhanced Polyurethane Coating		
		0.5mm Wear Layer		
	Core	4.0mm Limestone Composite: min. 64% stone, 0% wood, 100% Virgin Material		
	Density	1970kg/m <sup>3</sup> ±10%		
	Pad	1.5mm Acoustical Pad Attached		
	Bevel	Painted Bevel		
Installation	Floating Glueless			
Under Floor Heating	Approved - See installation manual for details.			
Warranty	50 years Residential/10 Years Light Commercial			
Test Data				
Static Load	ASTM F970	2000PSI		
Heat Exposure Resistance F1700	ASTM F2199 EN16511	≤0.15%		
Swelling after submersion	NALFA LF 01-2011	0% Class 4, Heavy Commercial		
IIC & STC	ASTM E492 / ASTM E90	IIC=45 / STC=61 With 1.5mm pad: IIC=66 / STC=61		
Castor Chair Resistance	ISO 4918	Pass		
Fire Rating	ASTM E648/ 662	Class I		
Wear Resistance F1700	EN 13329 method A EN 16511	Class 34, Heavy Commercial Class 34, Heavy Commercial		
Impact Resistance (Big Ball)	NALFA LF01-2011 EN 16511	Class 4, Heavy Commercial IC3, Class 34, Heavy Commercial		
Impact Resistance (Small Ball)	NALFA LF01-2011	Class 4, Heavy Commercial		
Static coefficient of Friction	ASTM D2047	Dry: 0.38, Wet: 0.9		
Resistance to staining F1700	ASTM F925 NALFA LF01-2011	Pass Class 4, Heavy Commercial		
Chemical Composition				
VOC	FloorScore™	Pass		
Ortho-phthalates	Prop 65	Not Detected / In Compliance		
Lead	CPSIA	None Detected		
Substances of Very High Concern (SVHC)		Not Detected		